

armor

UNIVERSAL CONCEALED TRANSOM



800 SERIES

FEATURES

- Hydraulic conceal closer
- Suitable for single or double action doors.
- Two valves for closing and latching speed adjustment.
- Interior, Exterior Light medium, and heavy available for different width (weight) door application.
- Option for 90 °or 105 °Hold open
- Accessories available for patch fitting
- UL, CUL Listed.

SELECTION CHART

Dood Size	Door Width	Closing Force/Opening Foring (Nm/Nm(lb))	Type
Interior	From 36" to 48" X 96"	7(Nm) / 17(Nm)5(lb)	105 °back stop with hold - open 105 °back stop — no hold open 90 °back stop with hold - open 90 °back stop — no hold open 130 °back stop 105 °hold open 130 °back stop — no hold open 130 °back stop 90 °hold open
Exterior	From 36" to 48" X 96"	14(Nm) / 29(Nm)8.5(lb)	
Light	Up to 30" X 96"	17(Nm) / 32(Nm)	
Medium	31" to 40" X 96"	23(Nm) / 39(Nm)	
Heavy	42" to 48" X 96"	31(Nm) / 51(Nm)	

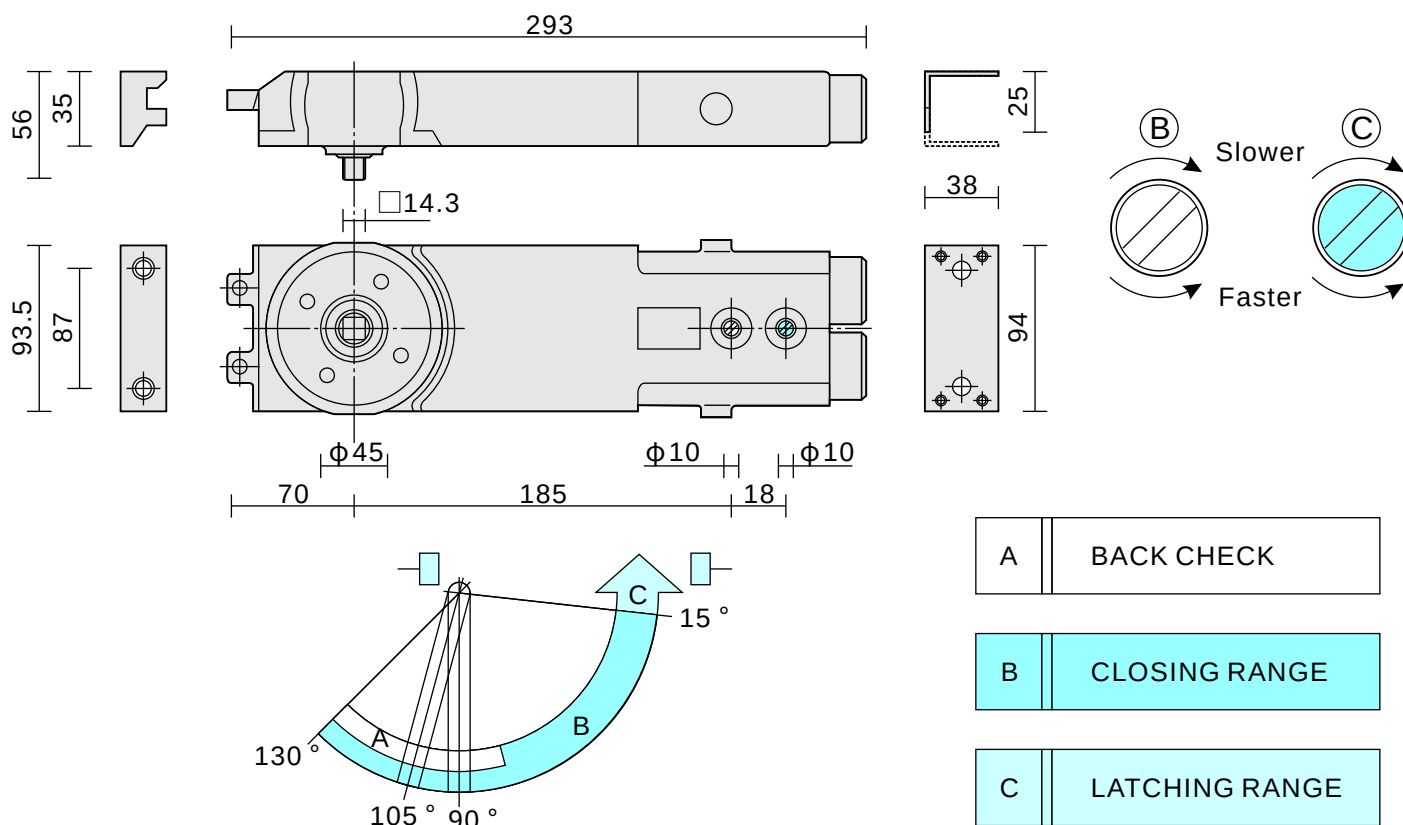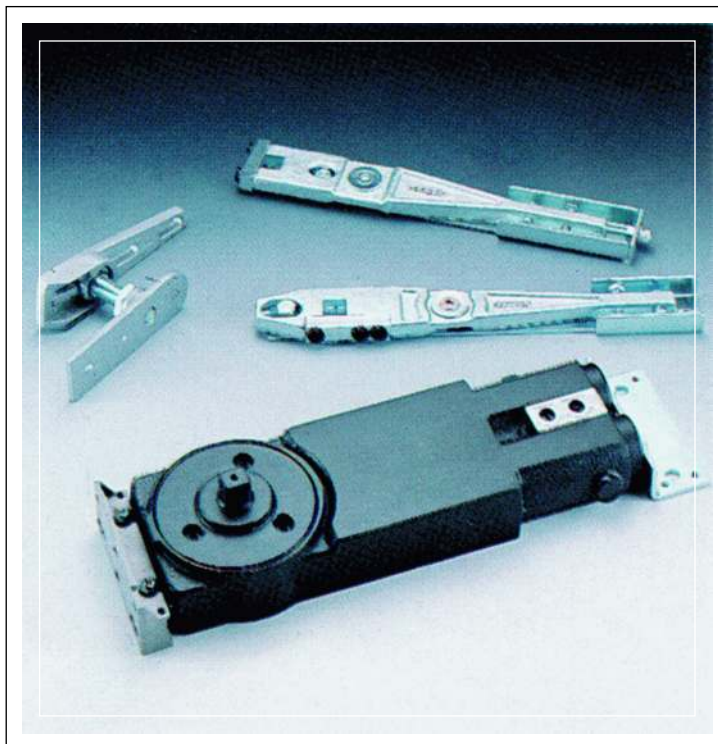

HENG KUO CO., LTD. - (TAIWAN)
KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT : No136, Ren De 5, Ta-Shi, Tao Yuan Hsien,
Taiwan R.O.C.
TEL : 886-3-380-2101 FAX : 886-3-380-2123
CHINA PLANT : No. 388 Lu Chen Road Kun Shan City CHINA
TEL : 86-512-861-86625 FAX : 86-512-575-70392

APPLY TO HOLLOW STEEL

