

armor

UNIVERSAL CONCEALED TRANSOM 810 SERIES

FEATURES

Hydraulic conceal closer.


Adjustable Spring power design provide three of power range version, from size 1 to size 3.

Suitable for ANSI standard

Supply Less inventory for wider user needs.


Accessories available for patch fitting

Option for 90 °or 105 °Hold open.


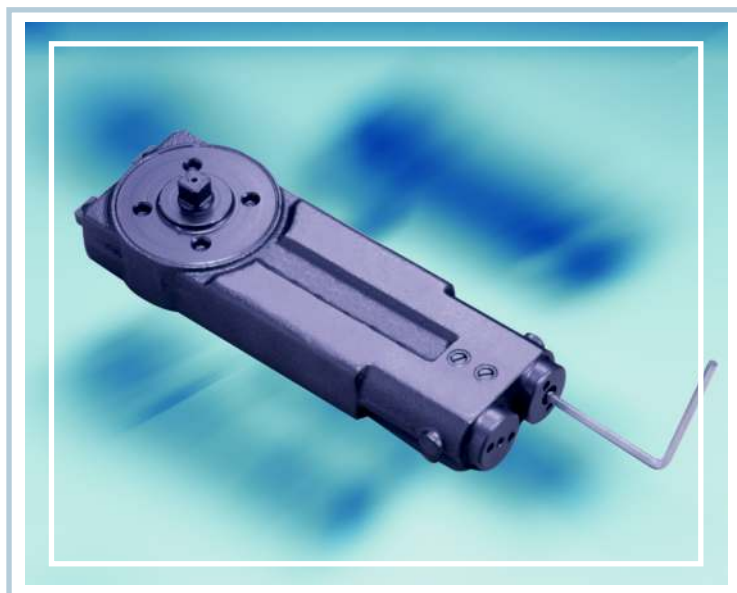


SELECTION CHART

SIZE	NO. OF TURNS	DIRECTION	INTERIOR MAXIMUM WIDTH	EXTERIOR DOOR MAXIMUM WIDTH	Door weight
1	0	FACTORY PRESET	30"	81/2" OPENING FORCE	15~30kg
2	3	CLOCKWISE (+)	34"	30"	15~30kg
3	9	CLOCKWISE (+)	38"	34"	25~45kg

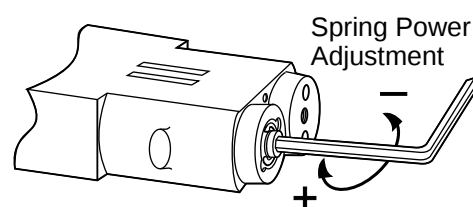

Spring power VS door size chart

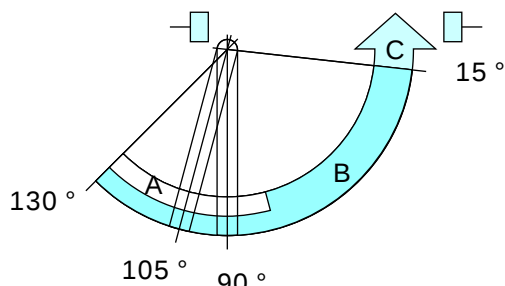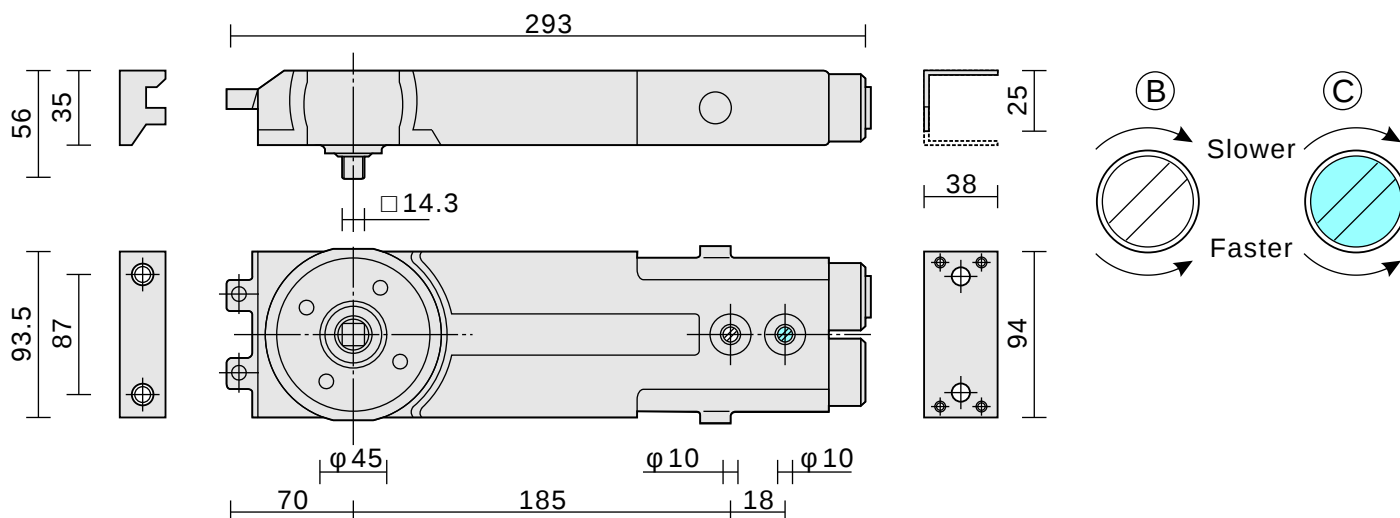

A	BACK CHECK
B	CLOSING RANGE
C	LATCHING RANGE



HENG KUO CO., LTD. - (TAIWAN)
KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT : No136, Ren De 5, Ta-Shi, Tao Yuan Hsien,
Taiwan R.O.C.
TEL : 886-3-380-2101 FAX : 886-3-380-2123
CHINA PLANT : No.388 Lu Chen Road kun Shan City CHINA
TEL : 86-512-861-86625 FAX : 86-512-575-70392

APPLY TO HOLLOW STEEL

