

armor

UNIVERSAL CONCEALED TRANSOM 950 SERIES


FEATURES

- @ Suitable for single or double action doors.
- @ 2 valves for closing and Latching speed adjustment.
- @ Light, medium, and heavy available for different width (weight) door Application.
- @ Full range accessories including side load arm, end load Arm(thickness from 1/2" to 1"), offset arm and pivot set, meet the application of different door and frame.



SELECTION CHART

Dood Size	Door Width	Closing Force / Opening Foring (Nm / lb)	Type
Interior	From 36" to 48" X 96"	7(Nm) / 2(lb)	105 ° back stop with hold - open 105 ° back stop - no hold open 90 ° back stop with hold - open 90 ° back stop - no hold open 130 ° back stop 105 ° hold open 130 ° back stop - no hold open 130 ° back stop 90 ° hold open
Exterior	From 36" to 48" X 96"	14(Nm) / 4(lb)	
Light	Up to 30" X 96"	17(Nm) / 5(lb)	
Medium	31" to 40" X 96"	23(Nm) / 7(lb)	
Heavy	42" to 48" X 96"	31(Nm) / 9(lb)	

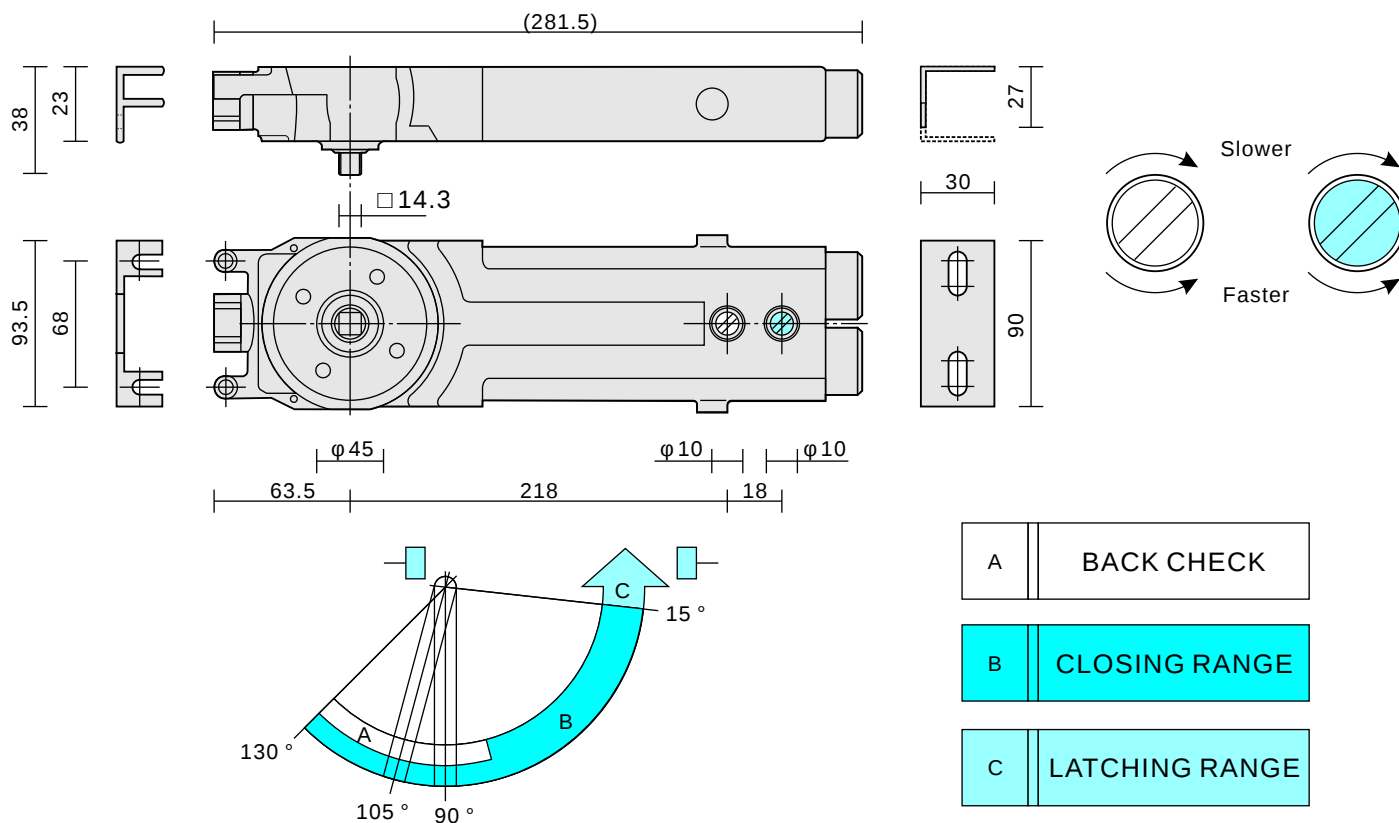

HENG KUO CO., LTD. – (TAIWAN)
KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT : No136, Ren De 5, Ta-Shi, Tao Yuan Hsien,
Taiwan R.O.C.
TEL : 886-3-380-2101 FAX : 886-3-380-2123
CHINA PLANT : No.388 Lu Chen Road kun Shan City CHINA
TEL : 86-512-861-86625 FAX : 86-512-575-70392

APPLY TO HOLLOW STEEL

