

armor

4800 SERIES

FEATURES



The 4800 series cast iron surface mount door closer is designed for low to high traffic in both interior and exterior applications. This is ideal for official buildings, hotels, manufacturing facilities, retail shops and other commercial uses.

- (1) Cast iron body provides superior strength and wear resistance.
- (2) Factory tested to meet ANSI grade 1 quality. Conforms UL10C and UBC 7-2. UL and cUL listed.
- (3) Adjustable spring power size range 1 through 6. Minimizing inventory. Meets ADA in all applications (except track).
- (4) Standard pressure relief valves for both opening and closing action, to protect the door and frame from damage by abuse.
- (5) High impact non-corrosive plastic covers as standard
- (6) Standard adjustable Back Check function
(Delay Action in optional)
- (7) Non-handed. Versatile mounting applications - standard, top jamb, parallel, push and pull track applications for 4800 series body. Various type arms available for special application uses.
- (8) Two speed adjusting valves for control door closing smoothly.
- (9) Peel-n-stick template for quick and easy installation.



SELECTION CHART

SIZE No .	STANDARD / TOP JAMB INSTALLATION				PARALLEL INSTALLATION				DOOR WEIGHT (Ret) lbs
	Interior door width (mm)	Exterior door width(mm)		Minimum Lbf.	Interior door width (mm)	Exterior door width(mm)		Minimum Lbf.	
		Swing out	Swing in			Swing out	Swing in		
4800-1	800	700	600	3	700	600	————	2	44
4800-2	900	800	700	5	800	700	600	3	44~88
4800-3	950	900	800	6	900	800	700	5	88~132
4800-4	1050	950	900	8	950	900	800	6	132~176
4800-5	1200	1050	950	11	1050	950	900	8	176~220
4800-6	1400	1200	1050	14	1200	1050	950	11	220~

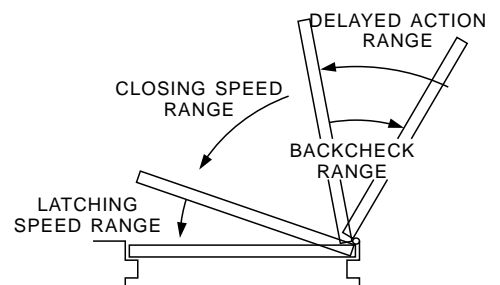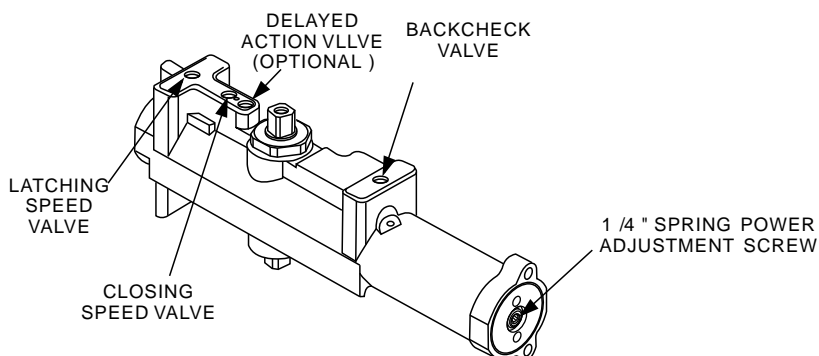

HENG KUO CO., LTD. – (TAIWAN)
KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT : No136, Ren De 5, Ta-Shi, Tao Yuan Hsien,
Taiwan R.O.C.
TEL : 886-3-380-2101 FAX : 886-3-380-2123
CHINA PLANT : No.388 Lu Chen Road kun Shan City CHINA
TEL : 86-512-861-86625 FAX : 86-512-575-70392