

armor



680 SERIES DOOR CLOSER

FEATURES

The series 680 is hydraulic door closer. A hardened steel rack and pinion mechanism is housed in a aluminum alloy body. Suitable for left or right and opening doors, top jamb and standard fixing.

A parallel bracket is supplied for parallel arm installations. Fixings for both metal and timber doors are included.

Adjustment valve screws.

Closing speed is adjustable from 180 °-15 °by turning (Swing speed range) counter clockwise for faster, clockwise for slower.



The latching(Latching speed range) can be adjusted in the same way for the last 15 °of closing.

Option for build in Back Check; Hold Open arm.

MAXIMUM DOOR WIDTH DIMENSION IN mm

SIZE No .	STANDARD / TOP JAMB INSTALLATION				DOOR WEIGHT (Ret) lbs
	Interior door width (mm)	Exterior door width(mm)		Minimum lbf	
		Swing out	Swing in		
2	900	800	700	5	44~88
3	950	900	800	6	88~132
4	1050	950	900	8	132~176

SIZE No .	PARALLEL INSTALLATION				DOOR WEIGHT (Ret) lbs
	Interior door width (mm)	Exterior door width(mm)		Minimum lbf	
		Swing out	Swing in		
2	800	700	600	2	44
3	900	800	700	3	44~88
4	950	900	800	5	88~132

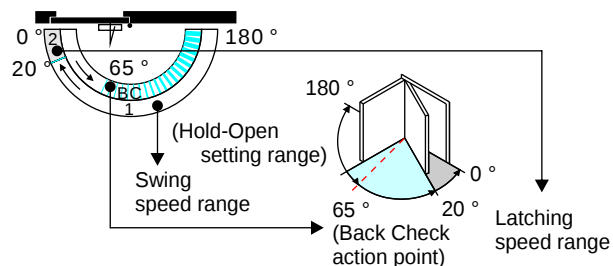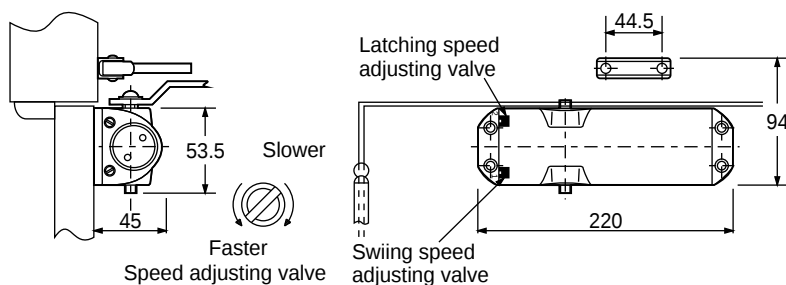

HENG KUO CO., LTD. – (TAIWAN)
KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT : No136, Ren De 5, Ta-Shi, Tao Yuan Hsien, Taiwan R.O.C.
TEL : 886-3-380-2101 FAX : 886-3-380-2123
CHINA PLANT : No.388 Lu Chen Road kun Shan City CHINA
TEL : 86-512-861-86625 FAX : 86-512-575-70392