

armor

90 SERIES DOOR CLOSER

FEATURES



- † U.L. Listed. Non-handed, for either right hand door or left hand door.
- † Rack and pinion mechanism contained in a high tensile aluminum precision housing assures the highest quality.
- † High quality hydraulic fluid offer smooth operation and constant lubrication.
- † Keeping door closed to protect small children.
- † Saving loss of heat in winter and air conditioning in summer.
- † Closing and latching speeds controlled by a regulating valve fully adjustable after installation.
- † Available in harmonizing 'Ivory' or 'Brown' color finishes.
- † Built in hold open (from 75 ° to 180 °) supplied as options.





SELECTION CHART

SIZE No .	STANDARD / TOP JAMB INSTALLATION				PARALLEL INSTALLATION			
	Interior door width (mm)	Exterior door width(mm)		Closing force (Kgf.m)	Interior door width (mm)	Exterior door width(mm)		Closing force (Kgf.m)
		Swing out	Swing in			Swing out	Swing in	
901					800	700	600	0.3
902	800	700	600	0.5	800	700	600	0.5

L - TYPE TRANSOM BRACKET(902)

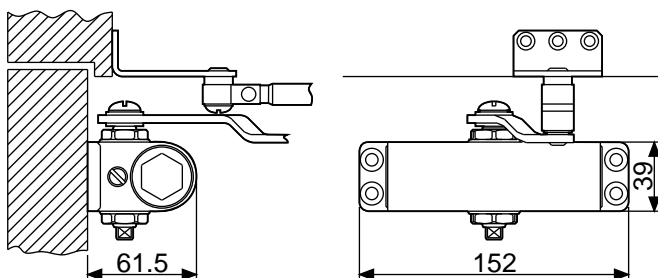

D - TYPE SOFFIT BRACKET(901)

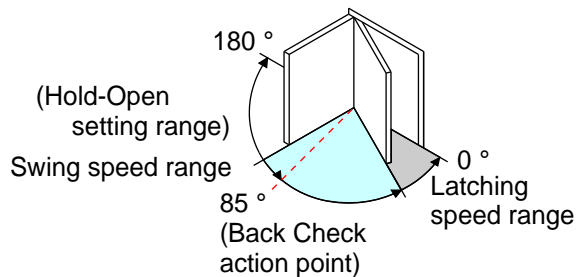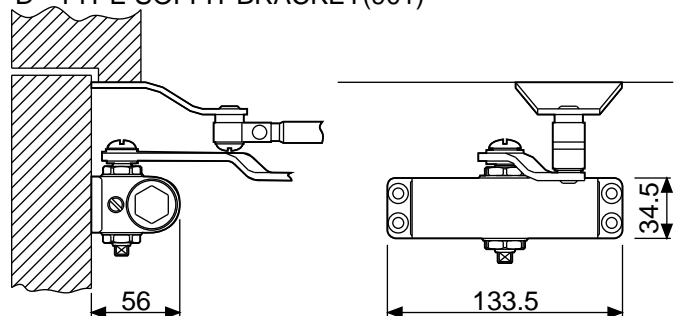

HENG KUO CO., LTD. – (TAIWAN)
KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT : No136, Ren De 5, Ta-Shi, Tao Yuan Hsien,
Taiwan R.O.C.
TEL : 886-3-380-2101 FAX : 886-3-380-2123
CHINA PLANT : No.388 Lu Chen Road kun Shan City CHINA
TEL : 86-512-861-86625 FAX : 86-512-575-70392