

armor

TS 100 SERIES DOOR CLOSER

FEATURES

Hydraulic door closer

The hardened steel rack and pinion mechanism is housed in the alloy aluminum body


Reversible for both left and right handed doors

Universal applications for standard, top jamb, or parallel arm installation (Optional parallel bracket)

Suitable for both metal and wooden doors






Adjustable closing speed from 180° ~15° by turning the adjusting valve 1

Adjustable latching speed from 15° ~0° by turning the adjusting valve 2

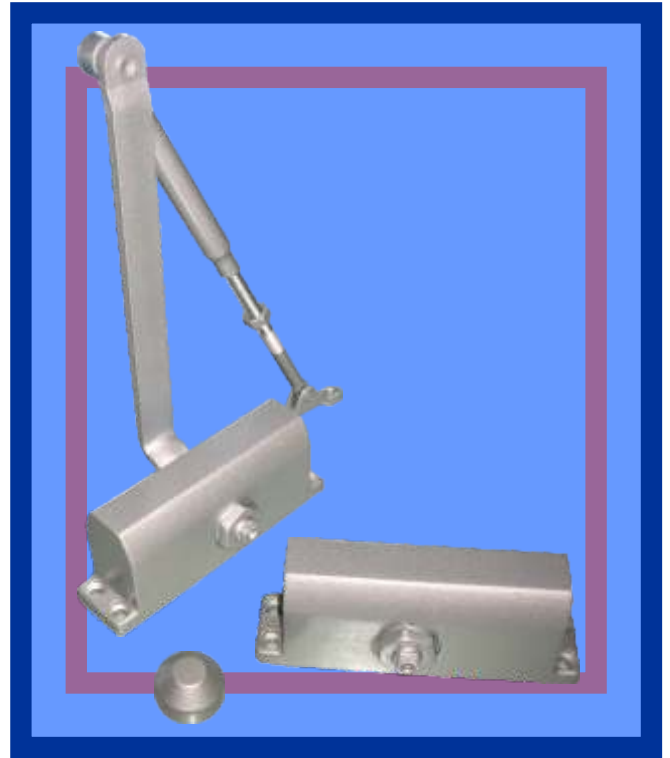

SELECTION CHART

SIZE No .	STANDARD / TOP JAMB INSTALLATION				PARALLEL INSTALLATION				DOOR WEIGHT (Ret) lbs
	Interior door width (mm)	Exterior door width(mm)		Minimum Lbf.	Interior door width (mm)	Exterior door width(mm)		Minimum Lbf.	
		Swing out	Swing in			Swing out	Swing in		
TS120	900	800	700	5	800	700	600	3	44~88
TS130	950	900	800	6	900	800	700	5	88~132

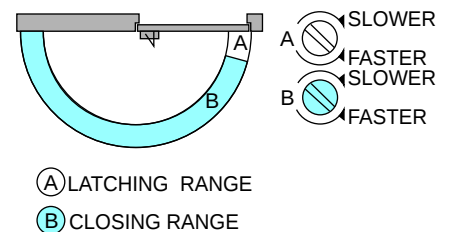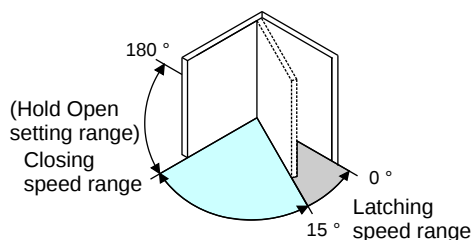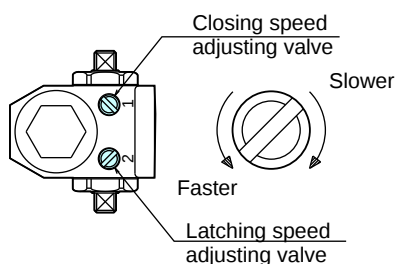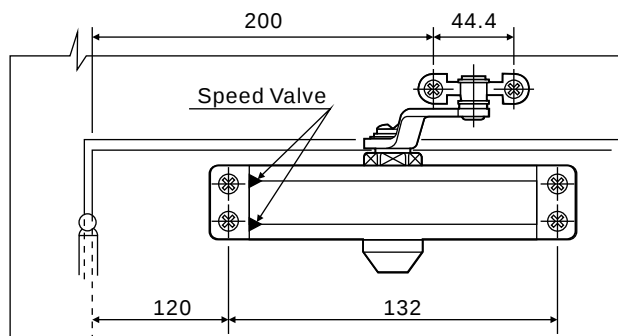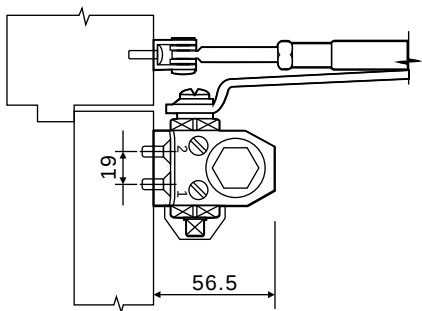

HENG KUO CO., LTD. – (TAIWAN)
KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT : No.136, Rende 5th St., Daxi Dist.,
Taoyuan City 335, Taiwan (R.O.C.)
TEL : 886-3-380-2101 FAX : 886-3-380-2123
CHINA PLANT : No .388 Lu Cnen Road kun Shan City CHINA
TEL : 86-512-861-86625 FAX : 86-512-575-70392