

armor

TS 300 SERIES DOOR CLOSER

FEATURES

Hydraulic door closer

The hardened steel rack and pinion mechanism is housed in the alloy aluminum body

Reversible for both left and right handed doors

Universal application for standard, top jamb, or parallel arm installation (Optional parallel bracket)

Suitable for both metal and wood doors

Adjustable closing speed from 180°~15° by turning the adjusting valve 1

Adjustable latching speed from 15°~0° by turning the adjusting valve 2






standard BACK CHECK.

Built in HOLD OPEN (Hold open in any place after 80°)



SELECTION CHART

SIZE No .	STANDARD / TOP JAMB INSTALLATION				PARALLEL INSTALLATION				Door weight (Kgs)
	Interior door width (mm)	Exterior door width(mm)		Closing force (Kgf.m)	Interior door width (mm)	Exterior door width(mm)		Closing force (Kgf.m)	
		Swing out	Swing in			Swing out	Swing in		
TS 302	900	800	700	1.0	800	700	600	0.7	25~65
TS 303	950	900	800	1.7	900	800	700	1.0	40~65

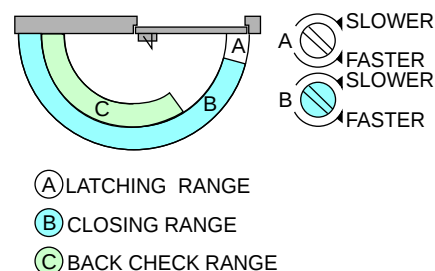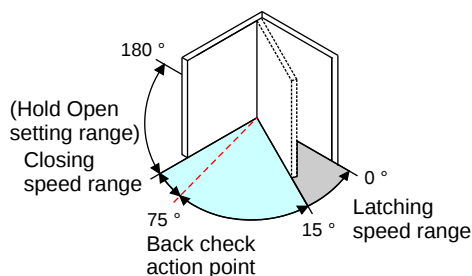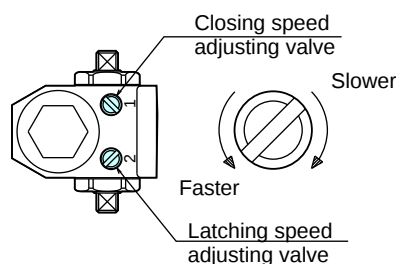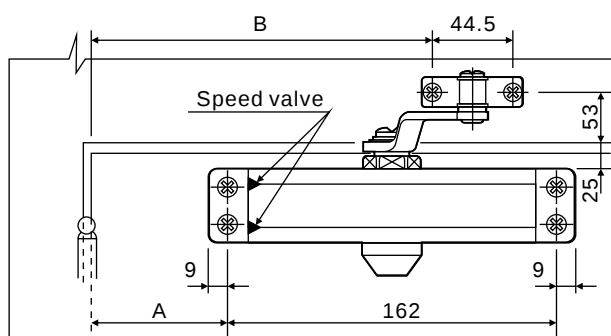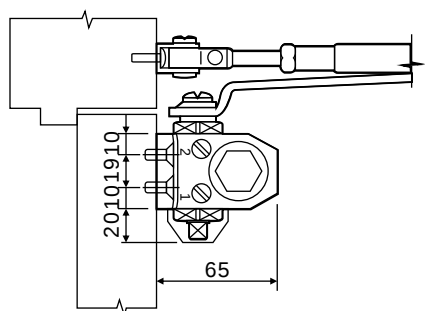



HENG KUO CO., LTD. – (TAIWAN)
KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT : No136, Ren De 5, Ta-Shi, Tao Yuan Hsien, Taiwan R.O.C.
TEL : 886-3-380-2101 FAX : 886-3-380-2123
CHINA PLANT : No.388 Lu Chen Road kun Shan City CHINA
TEL : 86-512-861-86625 FAX : 86-512-575-70392

Installation instructions (for 180 ° opening)



STANDARD INSTALLATION

(Closer mounted on door on pull side)

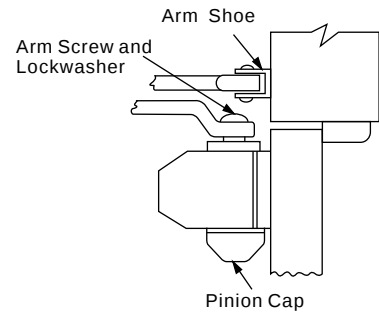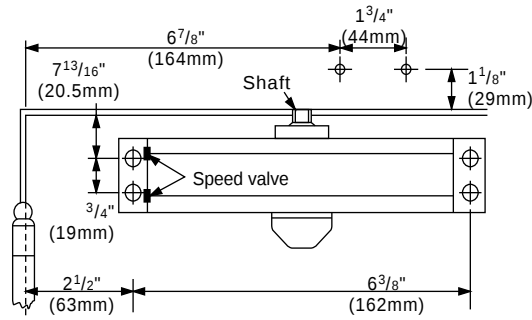



TOP JAMB INSTALLATION

(Closer mounted on top jamb on push side of door)

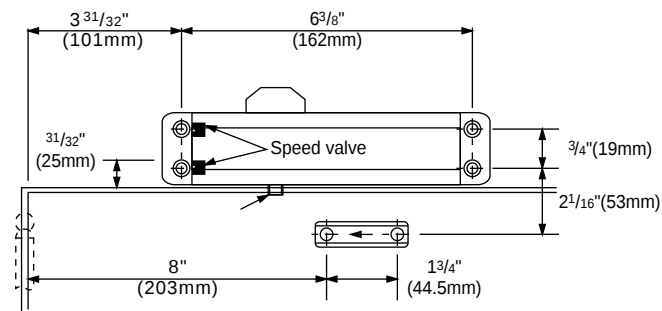

PARALLEL INSTALLATION

(Closer mounted on door on push side)

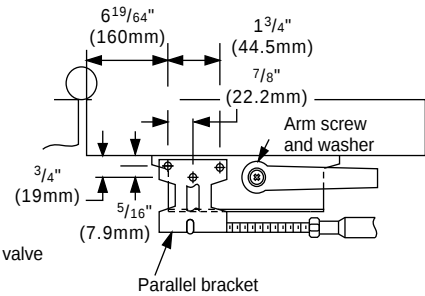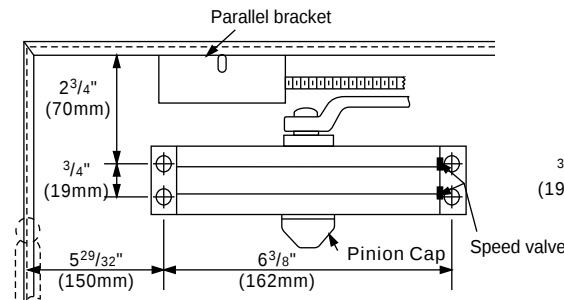

Finished color Abbreviations : AL (Aluminium) 、 DU (Dark Bronze) 、 BZ (Gold)

Three years warranty from delivery.