



TS60 SERIES DOOR CLOSER

Features


- ◆ Hydraulic door closer
- ◆ Closer power available Size closer 1,2,3 or 4
Size 2-4 by template
- ◆ The hardened steel rack and pinion mechanism is housed in the alloy aluminum body
- ◆ Reversible for both left and right handed doors
- ◆ Universal applications for standard, top jamb, or parallel arm installation (Optional parallel bracket)
- ◆ Suitable for both metal and wooden doors
- ◆ Adjustable closing speed from $180^{\circ} \sim 15^{\circ}$
- ◆ Adjustable latching speed from $15^{\circ} \sim 0^{\circ}$



SELECTION CHART

SIZE No .	STANDARD / TOP JAMB INSTALLATION		PARALLEL INSTALLATION	
	max door weight (kg)	max door width (mm)	max door weight (kg)	max door width (mm)
TS61	20	750	—	650
TS62	40	850	20	750
TS63	60	950	40	850
TS64	80	1100	60	950

TECHNICAL INFORMATION

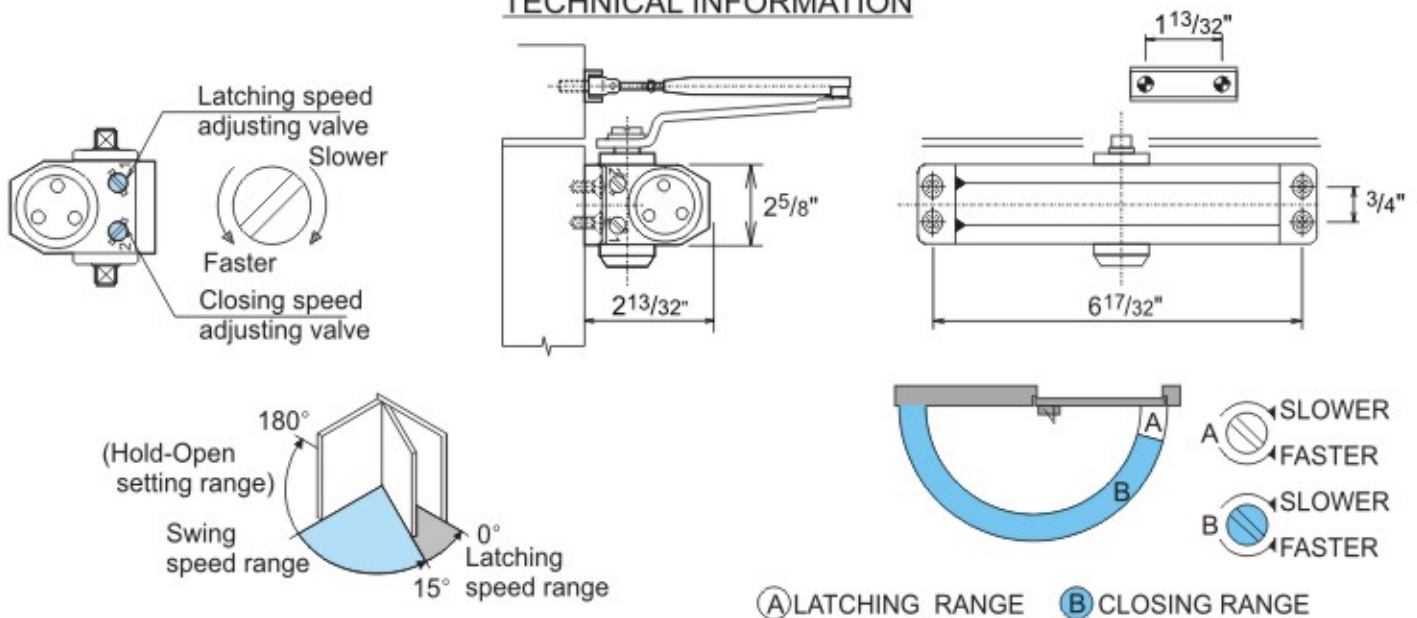

HENG KUO CO., LTD. - (TAIWAN)
KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT : No136, Ren De 5, Ta-Shi, Tao Yuan Hsien,
Taiwan R.O.C.
TEL : 886-3-380-2101 FAX : 886-3-380-2123
CHINA PLANT : No.388 Lu Chen Road kun Shan City CHINA
TEL : 86-512-861-86625 FAX : 86-512-575-70392