


armor

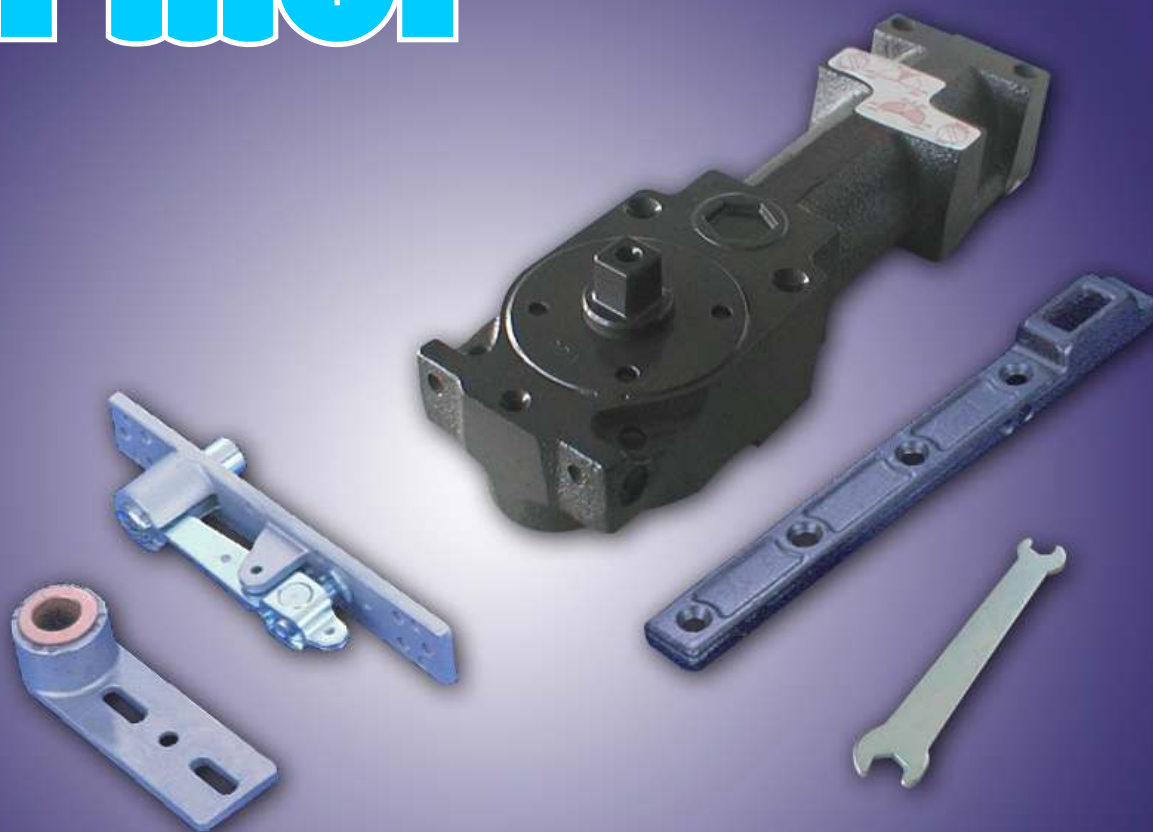

750 N

UNIVERSAL FLOOR SPRING

FEATURES

- @ Universal non-handed floor spring for single and double action doors.
- @ Maximum comfort and safety provided by multi-functional unit.
- @ Fitting spindle inserts available to suit site conditions.
- @ Concealed installation for clean, uncluttered lines.
- @ Proven, robust unit for doors up to 150 kg in weight.
- @ Spindle dimension can be made by customer requirement.



Technical Data

Spring strength	Standard	weak
Closing force in Nm, approx.	28	15
Standard doors up to 800mm		Yes
1100mm	Yes	
Non-handed, for single & double action doors	Yes	Yes
Closing and latching speed variable by valve adjustment	Yes	Yes
Hold-open point 90 ° or 105 °	Option	Option
Weight in kg, approx.	5.0	
Dimensions in mm		
Length X Width X Height	291 X 78 X 50	

Selectable functions

Hold-Open

With the Hold-Open feature (optional extra), the door can be held at angles of either 90 ° or 105 °

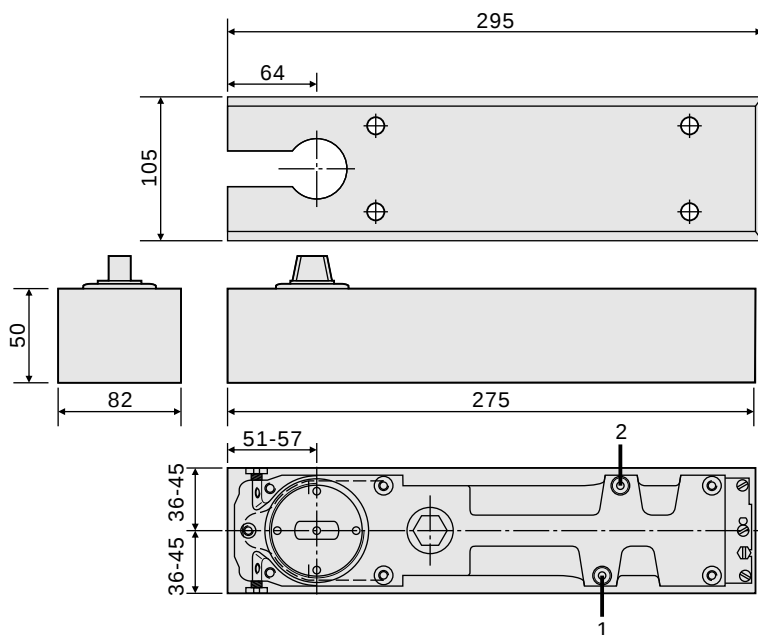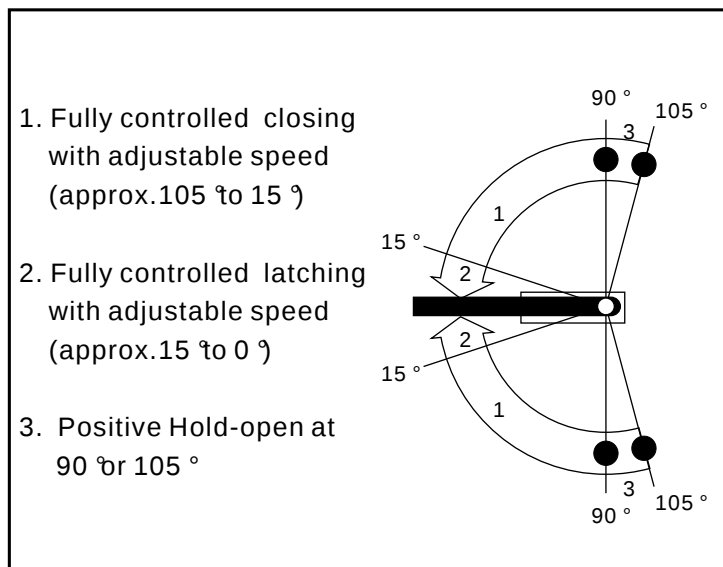

- 1. Closing speed Valve
- 2. Latching speed Valve

Options and accessories



HENG KUOCO., LTD. — TAIWAN
KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT : No 136, Ren De 5, Ta-Shi, Tao Yuan Hsien, Taiwan, R. O. C
TEL : 886-3-380-2101 FAX : 886-3-380-2123
KUN SHAN PLANT : No 388 Lu Cnen Road Kun Shan City China
TEL : 86-512-86186625 FAX : 86-512-57570392