

FEATURES

- @ Universal non-handed floor spring for single and double action doors.
- @ Maximum comfort and safety provided by multi-functional unit.
- @ Interchangeable spindle inserts available to suit site conditions.
- @ Concealed installation for clean, uncluttered lines.
- @ Wide range of functions: Back-Check, Delayed Action, Hold-open (optional extra).
- @ Proven, robust unit for doors up to 150 kg in weight.
- @ Changeable spindle insert available to suit field conditions.

Technical Data

Spring strength		Standard	weak
Closing force in Nm, approx.		28	15
Standard doors up to	800mm		Yes
	1100mm	Yes	
Non-handed, for single & double action doors		Yes	Yes
Closing speed variable by valve adjustment		Yes	Yes
Hold-open point	90°	Option	Option
Weight in kg, approx.		5.0	
Dimensions in mm			
Length X Width X Height		291 X 78 X 50	

Delayed Action


The integral delayed action feature serves to restrict door closing for a predetermined time so that disabled people, mothers with prams and predetermined time so that disabled people, mothers with prams and people carrying bulky items are able to pass through the door without difficulty.


Back-Check

The integral mechanical Back-Check helps to prevents damage to the door and wall in the event of the door being opened with excessive force.

Hold-Open


With the Hold-Open feature (optional extra), the door can be held at angles of either 90 °

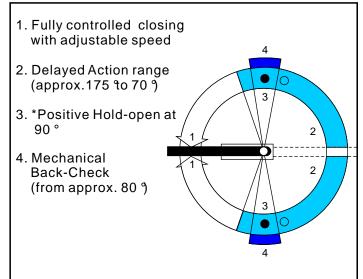

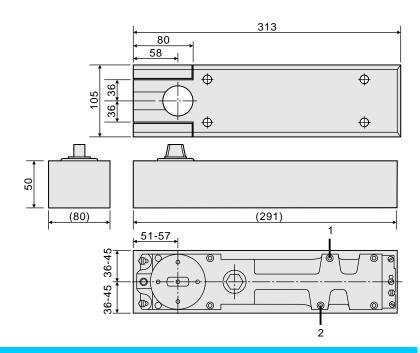

- 1.Closing speed Valve
- 2. Delayed action Valve

Options and accessories



Interchangeable Spindles

CAT. NO	COLLAR (A) HEIGHT	DOOR (B)CLEARANCE
2040-AT-001A	*1/8"(3 mm)	5/16"(8 mm)
2040-AT-001A025	5/16"(8 mm)	1/2"(13 mm)
2040-AT-001A100	1/2"(13 mm)	11/16"(17 mm)
2040-AT-001A150	3/4"(18 mm)	15/16"(24 mm)
2040-AT-001A200	7/8"(23 mm)	1-1/16"(27 mm)
2040-AT-001A250	1-1/8"(28 mm)	1-5/16"(33 mm)
2040-AT-001A300	1-5/16"(33 mm)	1-7/16"(37 mm)

*Standard Spindle Supplied with Closer

HENG KUOCO., LTD. — TAIWAN KUNSHAN HENG KUO MACHINERY CO., LTD

TAIWAN PLANT: No.136, Rende 5th St., Daxi Dist., Taoyuan Ćity 335, Taiwan R.O.C.

TEL: 886-3-380-2101 FAX: 886-3-380-2123
CHINA PLANT: No.388 Lu Cnen Road kun shan City CHINA
TEL: 86-512-861-86625 FAX: 86-512-575-70392